

**Oil-Fog Lubricator
G2**

- High flow unit
- Simple and accurate drip rate adjustment, knurled locknut
- Easily removed for rapid maintenance
- Ideal for high flow general lubrication applications

Technical Data

Medium:

Compressed air only

Maximum Pressure:

16 bar

Operating Temperature:

-20°C* to +80°C

*Consult our Technical Service for use below +2°C

Start Point at 6,3 bar:

140 dm³/s

Nominal Bowl Capacity:

1 litre, 8 litre and 20 litre

Maximum Flow with 6,3 bar inlet pressure and pressure drop of 0,5 bar:

675 dm³/s


Port Size

G2 to ISO 1179

Accepts ISO 228 (BS 2779) parallel or ISO 7 (BS 21) taper connectors

Alternative Models

Other port thread forms



Materials

Aluminium alloy bowl (1 litre), steel reservoirs (8 litre and 20 litre).
Aluminium alloy body. Synthetic rubber elastomeric materials.

Ordering Information

To order a standard Oil-Fog Lubricator, quote model number from table overleaf.


For non-standard models please consult our Technical Service.

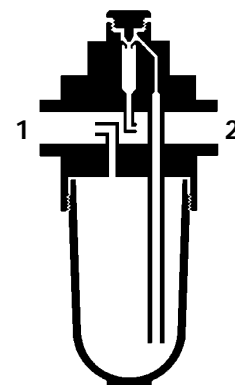



Typical Performance Characteristics

FLOW CHARACTERISTICS

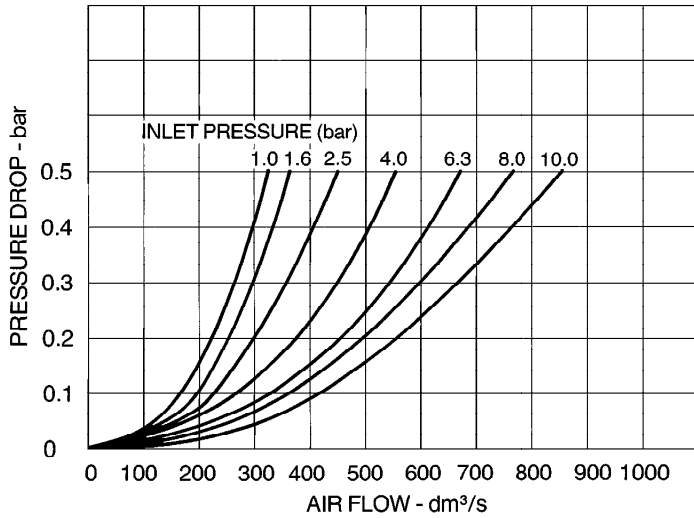

Standard Oil-Fog-Lubricators

Type	Bowl Capacity	Port Size	Model	Weight kg
Metal bowl	1 litre	G2	10-826-997	4,60
	8 litre	G2	10-826-999	15,00
	20 litre	G2	10-826-998	32,20



Non-standard Models

For other options, please consult our Technical Service.



Metal Bowl - 1 litre



10-826-997 G2

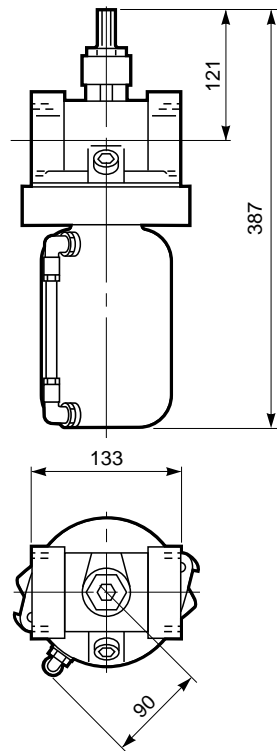

High Capacity Reservoirs

8 litre

20 litre

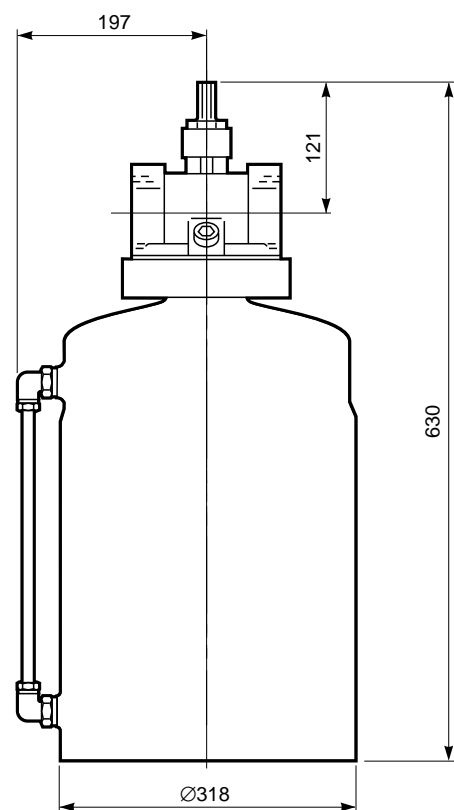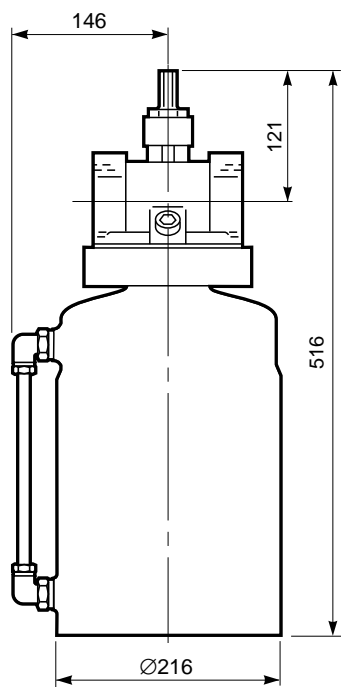



Spares Kits

Unit	Gasket Kit	Service Kit
Lubricator Head	10-026-GK	10-026-100
8 & 20 Litre Reservoirs	TR-GK	-

Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where *pressures* and *temperatures* can exceed those listed under **'Technical Data'**.

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems, or other applications not within published specifications, consult NORGREN MARTONAIR.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes. The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.